


SEND THE INQUIRY

+358 103 195 100

**Standards:**

DIN 603  
ISO 8677  
PN-M 82406

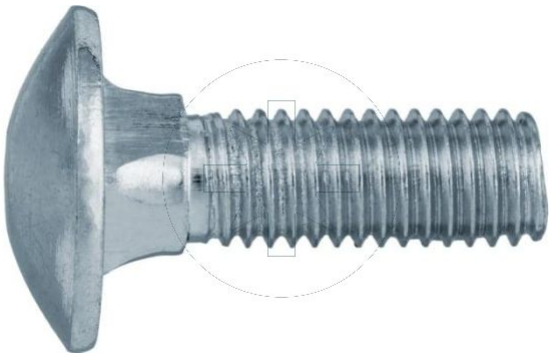

Luokka:

4.8

Luokka - pyynnöstä :

8.8


Pinnoite tyyppi:

**B**  
POWŁOKA  
CYNKOWA  
BIAŁA

Pinnoite - pyynnöstä :

**A**  
POWŁOKA  
CYNKOWA  
ZŁOTA

**S**  
WYROB  
SUROWY

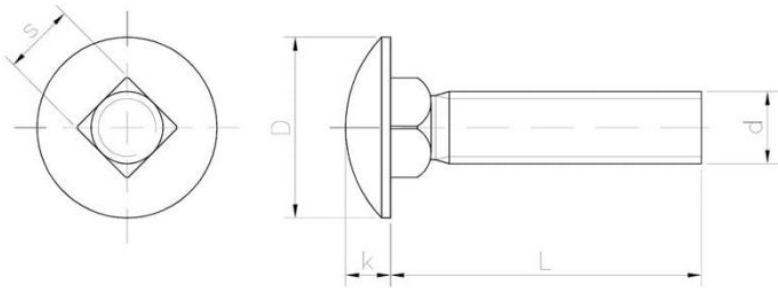

Dimensions

Material index	d	L [mm]	D [mm]	k [mm]	s [mm]	Mekaaninen luokitus	Pinnoite tyyppi	Yksikkö
1108080025BD603T	M8	25	20.0	5.0	8.0	4.8	B - ocynk biały	TYS
1108050020BD603T	M5	20	13.0	3.0	5.0	4.8	B - ocynk biały	TYS
1108060020BD603K	M6	20	16.0	3.5	6.0	4.8	B - ocynk biały	KG
1108100025BD603K	M10	25	24.0	6.0	10.0	4.8	B - ocynk biały	KG
1108100020BD603K	M10	20	24.0	6.0	10.0	4.8	B - ocynk biały	KG
1108080025BD603K	M8	25	20.0	5.0	8.0	4.8	B - ocynk biały	KG
1108100030BD603K	M10	30	24.0	6.0	10.0	4.8	B - ocynk biały	KG
1108060016BD603K	M6	16	16.0	3.5	6.0	4.8	B - ocynk biały	KG
1108050016BD603K	M5	16	13.0	3.0	5.0	4.8	B - ocynk biały	KG
1108080020BD603K	M8	20	20.0	5.0	8.0	4.8	B - ocynk biały	KG
1108050030BD603K	M5	30	13.0	3.0	5.0	4.8	B - ocynk biały	KG
1108060030BD603K	M6	30	16.0	3.5	6.0	4.8	B - ocynk biały	KG