

SEND THE INQUIRY

+358 103 195 100


Standards:

DIN 440  
ISO 7094  
PN-M 82019

Pinnoite tyyppi:



Pinnoite - pyynnöstä :

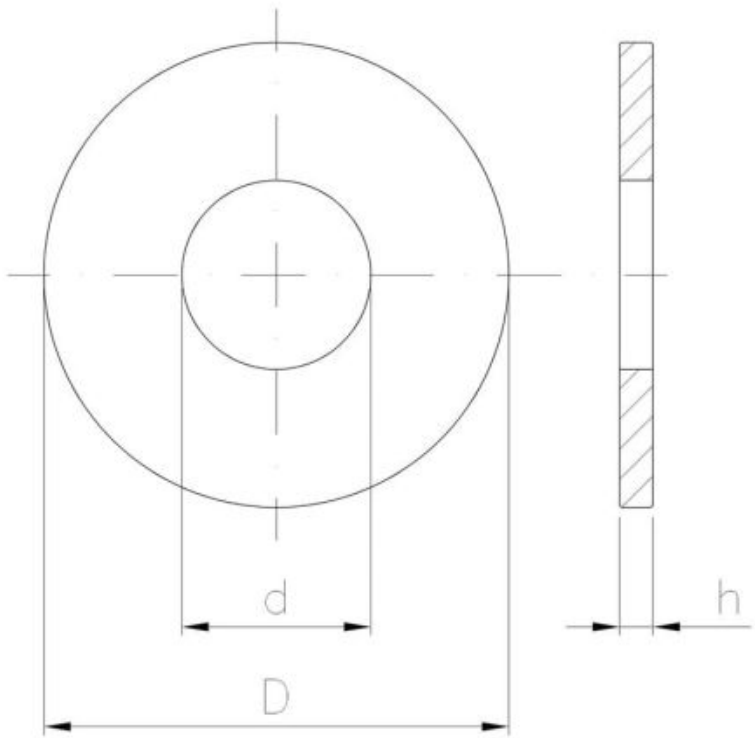

| Dimensions       |        |        |        |                 |         |
|------------------|--------|--------|--------|-----------------|---------|
| Material index   | d [mm] | D [mm] | h [mm] | Pinnoite tyyppi | Yksikkö |
| 1402301050BD440S | 31.0   | 105    | 6.0    | B - ocynk biały | ST      |
| 1402200720BD440S | 22.0   | 72     | 6.0    | B - ocynk biały | ST      |
| 1402080280BD440T | 9.0    | 28     | 3.0    | B - ocynk biały | TYS     |
| 1402120440BD440T | 13.5   | 44     | 4.0    | B - ocynk biały | TYS     |
| 1402160560BD440T | 17.5   | 56     | 5.0    | B - ocynk biały | TYS     |
| 1402060220BD440T | 6.6    | 22     | 2.0    | B - ocynk biały | TYS     |
| 1402140500BD440T | 15.5   | 50     | 4.0    | B - ocynk biały | TYS     |
| 1402050180BD440T | 5.5    | 18     | 2.0    | B - ocynk biały | TYS     |
| 1402080280020BT  | 9.0    | 28     | 3.0    | B - ocynk biały | TYS     |

| Material index   | d [mm] | D [mm] | h [mm] | Pinnoite tyyppi | Yksikkö |
|------------------|--------|--------|--------|-----------------|---------|
| 1402100340BD440T | 11.0   | 34     | 3.0    | B - ocynk biały | TYS     |
| 1402240850BD440K | 25.0   | 85     | 6.0    | B - ocynk biały | KG      |
| 1402160SD440K    | 17.5   | 56     | 5.0    | S - surowy      | KG      |
| 1402200BD440K    | 22.0   | 72     | 6.0    | B - ocynk biały | KG      |
| 1402050BD440K    | 5.5    | 18     | 2.0    | B - ocynk biały | KG      |
| 1402140BD440K    | 15.5   | 50     | 4.0    | B - ocynk biały | KG      |
| 1402060SD440K    | 6.6    | 22     | 3.0    | S - surowy      | KG      |
| 1402080SD440K    | 9.0    | 28     | 3.0    | S - surowy      | KG      |
| 1402080285015BK  | 9.0    | 28     | 3.0    | B - ocynk biały | KG      |
| 1402120SD440K    | 13.5   | 44     | 4.0    | S - surowy      | KG      |
| 1402180BD440K    | 19.0   | 56     | 5.0    | B - ocynk biały | KG      |
| 1402100SD440K    | 11.0   | 34     | 3.0    | S (surowy)      | KG      |
| 1402060BD440K    | 6.6    | 22     | 3.0    | B - ocynk biały | KG      |
| 1402080BD440K    | 9.0    | 28     | 3.0    | B - ocynk biały | KG      |
| 1402100BD440K    | 11.0   | 34     | 3.0    | B - ocynk biały | KG      |
| 1402120BD440K    | 13.5   | 44     | 4.0    | B - ocynk biały | KG      |
| 1402160BD440K    | 17.5   | 56     | 5.0    | B - ocynk biały | KG      |