


SEND THE INQUIRY

+358 103 195 100

Standards:

DIN 912  
GOST 11738-84  
ISO 4762  
PN-M 82302

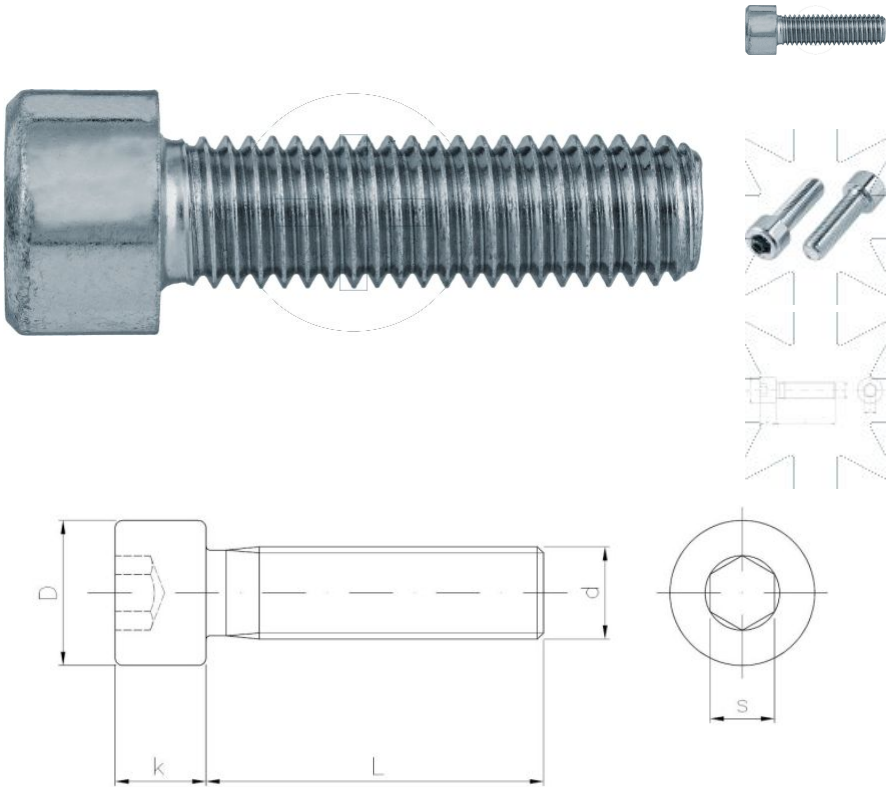

Dimensions

| Material index     | d   | L [mm] | D [mm] | k [mm] | s [mm] | Materiaaleja           |
|--------------------|-----|--------|--------|--------|--------|------------------------|
| I1106160080A2D912S | M16 | 80     | 24.0   | 12.0   | 14.0   | A2 (stal nierdzewna)   |
| I1106160060A2D912S | M16 | 60     | 24.0   | 12.0   | 14.0   | A2 (stal nierdzewna)   |
| I1106120060A2D912S | M12 | 60     | 18.0   | 12.0   | 10.0   | A2 (stal nierdzewna)   |
| I1106120040A2D912S | M12 | 40     | 18.0   | 12.0   | 10.0   | A2 (stal nierdzewna)   |
| I1106100100A2D912T | M10 | 100    | 16.0   | 10.0   | 8.0    | A2 (stal nierdzewna)   |
| I1106100090A2D912T | M10 | 90     | 16.0   | 10.0   | 8.0    | A2 (stal nierdzewna)   |
| I1106100080A2D912T | M10 | 80     | 16.0   | 10.0   | 8.0    | A2 (stal nierdzewna)   |
| I1106100045A2D912T | M10 | 45     | 16.0   | 10.0   | 8.0    | A2 (stal nierdzewna)   |
| I1106100020A4D912S | M10 | 20     | 16.0   | 10.0   | 8.0    | A4 (stal kwasoodporna) |
| I1106100016A2D912T | M10 | 16     | 16.0   | 10.0   | 8.0    | A2 (stal nierdzewna)   |
| I1106080080A4D912S | M8  | 80     | 13.0   | 8.0    | 6.0    | A4 (stal kwasoodporna) |
| I1106080080A2D912T | M8  | 80     | 13.0   | 8.0    | 6.0    | A2 (stal nierdzewna)   |
| I1106080060A4D912T | M8  | 60     | 13.0   | 8.0    | 6.0    | A4 (stal kwasoodporna) |
| I1106080050A4D912S | M8  | 50     | 13.0   | 8.0    | 6.0    | A4 (stal kwasoodporna) |
| I1106080030A4D912T | M8  | 30     | 13.0   | 8.0    | 6.0    | A4 (stal kwasoodporna) |
| I1106080025A4D912S | M8  | 25     | 13.0   | 8.0    | 6.0    | A4 (stal kwasoodporna) |
| I1106080020A4D912S | M8  | 20     | 13.0   | 8.0    | 6.0    | A4 (stal kwasoodporna) |
| I1106080016A4D912T | M8  | 16     | 13.0   | 8.0    | 6.0    | A4 (stal kwasoodporna) |
| I1106080012A2D912T | M8  | 12     | 13.0   | 8.0    | 6.0    | A2 (stal nierdzewna)   |

| Material index     | d  | L [mm] | D [mm] | k [mm] | s [mm] | Materiaaleja           |
|--------------------|----|--------|--------|--------|--------|------------------------|
| I1106060080A4D912T | M6 | 80     | 10.0   | 6.0    | 5.0    | A4 (stal kwasoodporna) |
| I1106060060A4D912T | M6 | 60     | 10.0   | 6.0    | 5.0    | A4 (stal kwasoodporna) |
| I1106060050A4D912T | M6 | 50     | 10.0   | 6.0    | 5.0    | A4 (stal kwasoodporna) |
| I1106060045A4D912T | M6 | 45     | 10.0   | 6.0    | 5.0    | A4 (stal kwasoodporna) |
| I1106060035A4D912T | M6 | 35     | 10.0   | 6.0    | 5.0    | A4 (stal kwasoodporna) |
| I1106060030A4D912T | M6 | 30     | 10.0   | 6.0    | 5.0    | A4 (stal kwasoodporna) |
| I1106060025A4D912T | M6 | 25     | 10.0   | 6.0    | 5.0    | A4 (stal kwasoodporna) |
| I1106060016A4D912T | M6 | 16     | 10.0   | 6.0    | 5.0    | A4 (stal kwasoodporna) |
| I1106060010A4D912S | M6 | 10     | 10.0   | 6.0    | 5.0    | A4 (stal kwasoodporna) |
| I1106050050A4D912T | M5 | 50     | 8.5    | 5.0    | 4.0    | A4 (stal kwasoodporna) |
| I1106050040A4D912T | M5 | 40     | 8.5    | 5.0    | 4.0    | A4 (stal kwasoodporna) |
| I1106050025A4D912T | M5 | 25     | 8.5    | 5.0    | 4.0    | A4 (stal kwasoodporna) |
| I1106050020A4D912T | M5 | 20     | 8.5    | 5.0    | 4.0    | A4 (stal kwasoodporna) |
| I1106050016A4D912T | M5 | 16     | 8.5    | 5.0    | 4.0    | A4 (stal kwasoodporna) |
| I1106050008A2D912T | M5 | 8      | 8.5    | 5.0    | 4.0    | A2 (stal nierdzewna)   |
| I1106040025A4D912T | M4 | 25     | 7.0    | 4.0    | 3.0    | A4 (stal kwasoodporna) |
| I1106040020A4D912T | M4 | 20     | 7.0    | 4.0    | 3.0    | A4 (stal kwasoodporna) |