

SEND THE INQUIRY


+358 103 195 100

Standards:

DIN 766~,DIN 5685-A~

B  
POWŁOKA  
CYNKOWA  
BIAŁA

Pinnoite tyyppi:

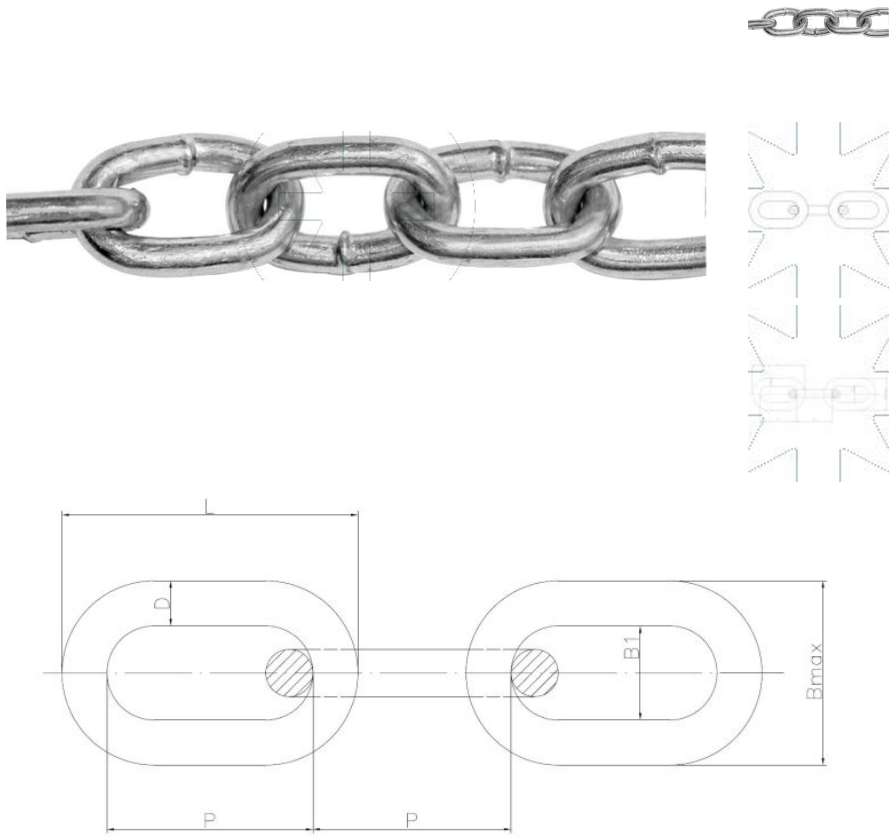

Dimensions

| Material index | D [mm] | L [mm] | P [mm] | B1 [mm] | Bmax [mm] | Kuormitettavuus [kg] | Murtolujuus [kg] | Tyyppi   |
|----------------|--------|--------|--------|---------|-----------|----------------------|------------------|----------|
| 6305130OC766M  | 13.0   | 63.6   | 36.0   | 12.0    | 36.0      | 2000                 | 8000             | DIN 766  |
| 6305130G766M   | 13.0   | 63.6   | 36.0   | 12.0    | 47.0      | 2000                 | 8000             | DIN 766  |
| 6305110G766M   | 11.0   | 53,8   | 31.0   | 13.2    | 37.4      | 1600                 | 6400             | DIN 766  |
| 6305100OC766M  | 10.0   | 60.0   | 28.0   | 14.0    | 38.0      | 1250                 | 5000             | DIN 766  |
| 6305100OC5685M | 10.0   | 60.0   | 40.0   | 14.0    | 38.0      | 500                  | 2000             | DIN 5685 |
| 6305100G766M   | 10.0   | 60.0   | 28.0   | 14.0    | 38.0      | 1250                 | 5000             | DIN 766  |
| 6305090G766M   | 9.0    | 46,2   | 27.0   | 10.8    | 30.6      | 1000                 | 4000             | DIN 766  |
| 6305080OC766M  | 8.0    | 41.0   | 24.0   | 11.0    | 30.0      | 800                  | 3200             | DIN 766  |
| 6305080OC5685M | 8.0    | 48.0   | 32.0   | 11.0    | 30.0      | 320                  | 1280             | DIN 5685 |
| 6305080G766M   | 8.0    | 41.0   | 24.0   | 11.0    | 30.0      | 800                  | 3200             | DIN 766  |
| 6305070OC766M  | 7.0    | 42.0   | 22.0   | 9.5     | 26.0      | 630                  | 2500             | DIN 766  |
| 6305070G766M   | 7.0    | 42.0   | 22.0   | 9.5     | 26.0      | 630                  | 2500             | DIN 766  |
| 6305060OC766M  | 6.0    | 36.0   | 18.5   | 8.0     | 23.0      | 400                  | 1600             | DIN 766  |
| 6305060OC5685M | 6.0    | 36.0   | 24.0   | 8.0     | 23.0      | 160                  | 640              | DIN 5685 |
| 6305060G766M   | 6.0    | 36.0   | 18.5   | 8.0     | 23.0      | 400                  | 1600             | DIN 766  |
| 6305050OC766M  | 5.0    | 31.0   | 18.5   | 7.0     | 19.0      | 320                  | 1250             | DIN 766  |
| 6305050OC5685M | 5.0    | 31.0   | 21.0   | 7.0     | 19.0      | 125                  | 500              | DIN 5685 |
| 6305050G766M   | 5.0    | 31.0   | 18.5   | 7.0     | 19.0      | 320                  | 1250             | DIN 766  |

| Material index | D [mm] | L [mm] | P [mm] | B1 [mm] | Bmax [mm] | Kuormitettavuus [kg] | Murtolujuus [kg] | Tyyppi   |
|----------------|--------|--------|--------|---------|-----------|----------------------|------------------|----------|
| 6305040OC766M  | 4.0    | 27.0   | 16.0   | 5.5     | 15.0      | 200                  | 800              | DIN 766  |
| 6305040OC5685M | 4.0    | 27.0   | 19.0   | 5.5     | 15.0      | 80                   | 320              | DIN 5685 |
| 6305040G766M   | 4.0    | 27.0   | 16.0   | 5.5     | 15.0      | 200                  | 800              | DIN 766  |
| 6305030OC5685M | 3.0    | 22.0   | 16.0   | 4.0     | 11.5      | 40                   | 160              | DIN 5685 |
| 6305020OC5685M | 2.0    | 16.0   | 12.0   | 2.5     | 7.5       | 20                   | 80               | DIN 5685 |
| 6305015OC5685M | 1.5    | 15.5   | 12.5   | 2.5     | 7.0       | 10                   | 40               | DIN 5685 |