


Standards:

DIN 913
ISO 4026
PN-M 82314

45H


B
POWŁOKA
CYNKOWA
BIAŁA

OX
OKSYDOWANE



Luokka:

Pinnoite tyyppi:

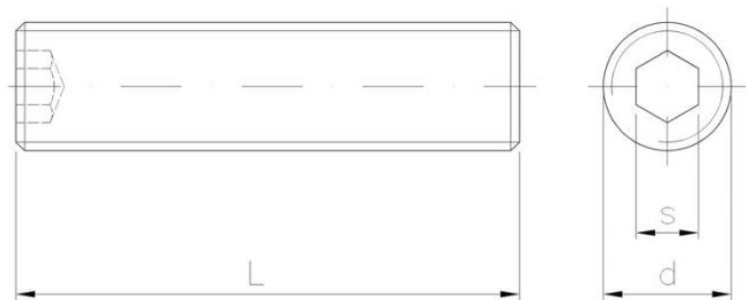

Dimensions

Material index	d	L [mm]	s [mm]	Mekaaninen luokitus	Pinnoite tyyppi
1201100025IMB913T	M10	25	5	45H	B - ocynk biały
1201100020IMO913T	M10	20	5	45H	B - ocynk biały
1201100012IMO913T	M10	12	5	45H	OX - powłoka oksydowana
1201100010IMO913T	M10	10	5	45H	OX - powłoka oksydowana
1201100010IMB913T	M10	10	5	45H	B - ocynk biały
1201080025IMB913T	M8	25	4	45H	B - ocynk biały
1201080020IMO913T	M8	20	4	45H	OX - powłoka oksydowana
1201080020IMB913T	M8	20	4	45H	B - ocynk biały
1201080012IMO913T	M8	12	4	45H	OX - powłoka oksydowana
1201080012IMB913T	M8	12	4	45H	B - ocynk biały
1201080010IMO913T	M8	10	4	45H	OX - powłoka oksydowana
1201080008IMO913T	M8	8	4	45H	OX - powłoka oksydowana
1201080008IMB913T	M8	8	4	45H	B - ocynk biały
1201060030IMB913T	M6	30	3	45H	B - ocynk biały
1201060025IMO913T	M6	25	3	45H	OX - powłoka oksydowana
1201060020IMO913T	M6	20	3	45H	OX - powłoka oksydowana
1201060020IMB913T	M6	20	3	45H	B - ocynk biały
1201060016IMO913T	M6	16	3	45H	OX - powłoka oksydowana

Material index	d	L [mm]	s [mm]	Mekaaninen luokitus	Pinnoite tyyppi
1201060016IMB913T	M6	16	3	45H	B - ocynk biały
1201060014IMO913T	M6	14	3	45H	B - ocynk biały
1201060012IMO913T	M6	12	3	45H	OX - powłoka oksydowana
1201060012IMB913T	M6	12	3	45H	B - ocynk biały
1201060010IMO913T	M6	10	3	45H	OX - powłoka oksydowana
1201060008IMO913T	M6	8	3	45H	OX - powłoka oksydowana
1201060008IMB913T	M6	8	3	45H	B - ocynk biały
1201060006IMO913T	M6	6	3	45H	OX - powłoka oksydowana
1201060006IMB913T	M6	6	3	45H	B - ocynk biały
1201050010IMO913T	M5	10	2.5	45H	OX - powłoka oksydowana
1201050010IMB913T	M5	10	2.5	45H	B - ocynk biały
1201050008IMO913T	M5	8	2.5	45H	OX - powłoka oksydowana
1201050005IMB913T	M5	5	2.5	45H	B - ocynk biały
1201050004IMO913T	M5	4	2.5	45H	OX - powłoka oksydowana
1201050004IMB913T	M5	4	2.5	45H	B - ocynk biały
1201040020IMO913T	M4	20	2	45H	OX - powłoka oksydowana
1201040020IMB913T	M4	20	2	45H	B - ocynk biały
1201040016IMB913T	M4	16	2	45H	B - ocynk biały
1201040012IMB913T	M4	12	2	45H	B - ocynk biały
1201040010IMO913T	M4	10	2	45H	OX - powłoka oksydowana
1201040008IMO913T	M4	8	2	45H	OX - powłoka oksydowana
1201040008IMB913T	M4	8	2	45H	B - ocynk biały
1201040006IMO913T	M4	6	2	45H	OX - powłoka oksydowana
1201040006IMB913T	M4	6	2	45H	B - ocynk biały
1201040005IMO913T	M4	5	2	45H	OX - powłoka oksydowana
1201040004IMO913T	M4	4	2	45H	OX - powłoka oksydowana
1201040004IMB913T	M4	4	2	45H	B - ocynk biały