

SEND THE INQUIRY




+358 103 195 100

Standards:

DIN 582



Pinnoite tyyppi:

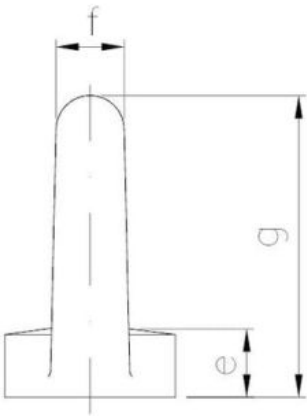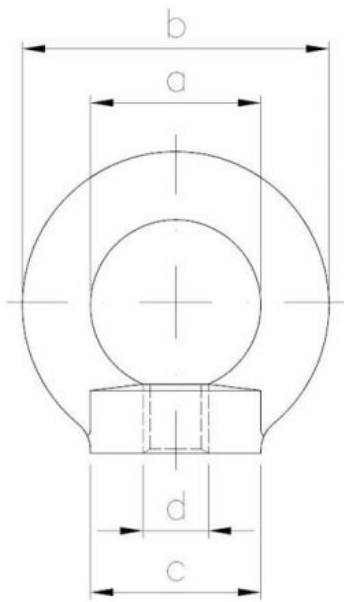

| Dimensions     |     |        |        |        |        |        |        |                      |
|----------------|-----|--------|--------|--------|--------|--------|--------|----------------------|
| Material index | d   | a [mm] | b [mm] | c [mm] | e [mm] | f [mm] | g [mm] | Kuormitettavuus [kg] |
| 6314080B582S   | M8  | 20     | 36     | 20     | 8.5    | 8      | 36     | 140                  |
| 6314060B582S   | M6  | 20     | 36     | 20     | 8.5    | 8      | 36     | 90                   |
| 6314100B582S   | M10 | 25     | 45     | 25     | 10     | 10     | 45     | 230                  |
| 6314120B582S   | M12 | 30     | 54     | 30     | 11     | 12     | 54     | 340                  |
| 6314140B582S   | M14 | 30     | 54     | 30     | 11     | 12     | 54     | 490                  |
| 6314160B582S   | M16 | 35     | 63     | 35     | 13     | 14     | 63     | 700                  |
| 6314180B582S   | M18 | 35     | 63     | 35     | 13     | 14     | 63     | 930                  |
| 6314220B582S   | M22 | 40     | 72     | 40     | 16     | 16     | 72     | 1500                 |
| 6314200B582S   | M20 | 40     | 72     | 40     | 16     | 16     | 72     | 1200                 |
| 6314240B582S   | M24 | 50     | 90     | 50     | 20     | 20     | 90     | 1800                 |

| Material index | d   | a [mm] | b [mm] | c [mm] | e [mm] | f [mm] | g [mm] | Kuormitettavuus [kg] |
|----------------|-----|--------|--------|--------|--------|--------|--------|----------------------|
| 6314270B582S   | M27 | 50     | 90     | 50     | 20     | 20     | 90     | 2500                 |
| 6314300B582S   | M30 | 60     | 108    | 65     | 25     | 24     | 108    | 3600                 |