


SEND THE INQUIRY

+358 103 195 100

Standards:

ETA-15/0145

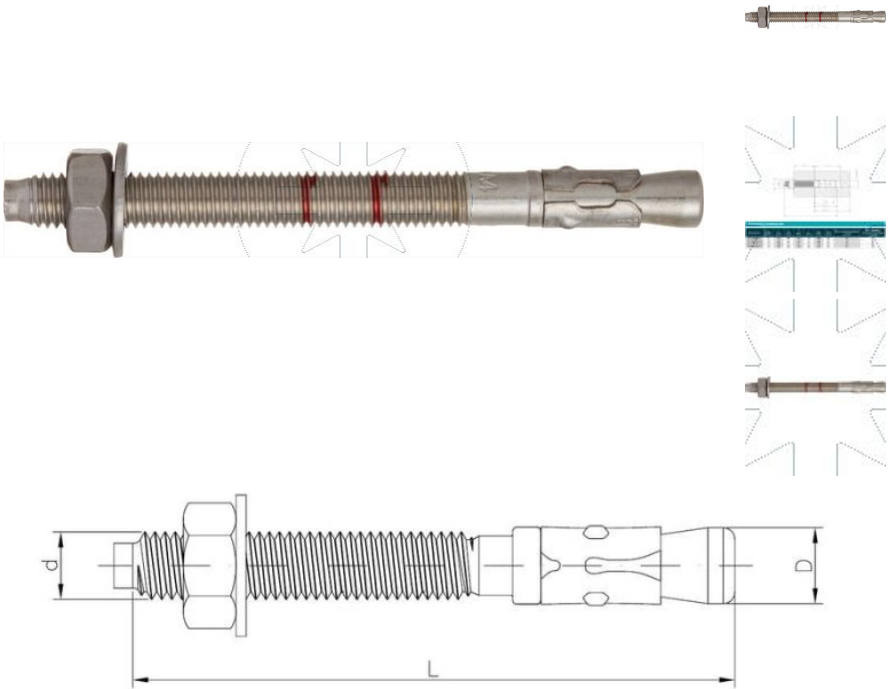

Materiaali:

Dimensions					
Material index	d	L [mm]	D [mm]	tfix [mm]	Materiaaleja
I5635100115A4S	M10	115	10	35	A4 (stal kwasoodporna)
I5635100105A4S	M10 (*)	105	10	25	A4 (stal kwasoodporna)
I5635100165A4S	M10 (*)	165	10	75	A4 (stal kwasoodporna)
I5635100135A4S	M10 (*)	135	10	55	A4 (stal kwasoodporna)
I5635100185A4S	M10 (*)	185	10	105	A4 (stal kwasoodporna)
I5635100090A4S	M10 (*)	90	10	10	A4 (stal kwasoodporna)
I5635120200A4S	M12 (*)	200	12	100	A4 (stal kwasoodporna)
I5635120130A4S	M12 (*)	130	12	20	A4 (stal kwasoodporna)
I5635120180A4S	M12 (*)	180	12	70	A4 (stal kwasoodporna)
I5635120110A4S	M12 (*)	110	12	10	A4 (stal kwasoodporna)
I5635120150A4S	M12 (*)	150	12	45	A4 (stal kwasoodporna)
I5635160125A4S	M16 (*)	125	16	10	A4 (stal kwasoodporna)
I5635160175A4S	M16 (*)	175	16	60	A4 (stal kwasoodporna)
I5635160145A4S	M16 (*)	145	16	30	A4 (stal kwasoodporna)
I5635160220A4S	M16 (*)	220	16	100	A4 (stal kwasoodporna)
I5635080075A4S	M8	75	8	10	A4 (stal kwasoodporna)
I5635080095A4S	M8	90	8	25	A4 (stal kwasoodporna)
I5635080115A4S	M8 (*)	115	8	50	A4 (stal kwasoodporna)
I5635080135A4S	M8 (*)	135	8	70	A4 (stal kwasoodporna)
I5635080068A4S	M8 (*)	68	8	4	A4 (stal kwasoodporna)

Material index	d	L [mm]	D [mm]	tfix [mm]	Materiaaleja
I5635080165A4S	M8 (*)	165	8	100	A4 (stal kwasoodporna)