


SEND THE INQUIRY

+358 103 195 100

Standards:

DIN 318

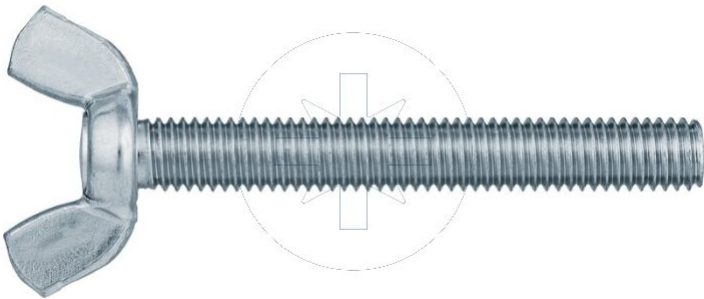

Luokka:

3.6

Luokka - pyynnöstä :

5.8

Pinnoite tyyppi:

B

POWŁOKA
CYNKOWA
BIAŁA

Pinnoite - pyynnöstä :

A

POWŁOKA
CYNKOWA
ŻÓŁTA

C

POWŁOKA
CYNKOWA
CZARNA

G


OCYNK
OGNIOWY

N

POWŁOKA
NIKLOWA

S

WYROB
SURÓWY

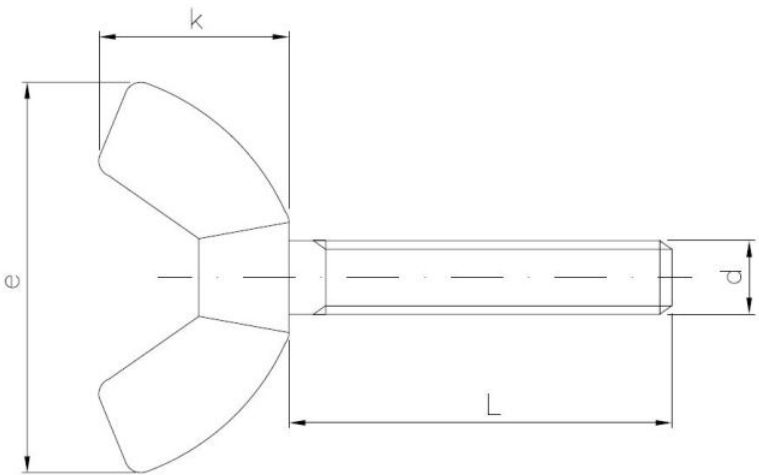

Dimensions

Material index	d	L [mm]	e [mm]	k [mm]	Mekaaninen luokitus	Pinnoite tyyppi
1115080050BS	M8	50	38	19	3.6	B - ocynk biały
1115080025BS	M8	25	38	19	3.6	B - ocynk biały
1115080030BS	M8	30	38	19	3.6	B - ocynk biały
1115080060BS	M8	60	38	19	3.6	B - ocynk biały
1115080040BS	M8	40	38	19	3.6	B - ocynk biały
1115080020BS	M8	20	38	19	3.6	B - ocynk biały
1115080016BS	M8	16	38	19	3.6	B - ocynk biały
1115060030BS	M6	30	32	16	3.6	B - ocynk biały
1115060020BS	M6	20	32	16	3.6	B - ocynk biały
1115060050BT	M6	50	38	19	3.6	B - ocynk biały
1115060010BS	M6	10	32	16	3.6	B - ocynk biały
1115060040BS	M6	40	32	16	3.6	B - ocynk biały
1115060012BS	M6	12	32	16	3.6	B - ocynk biały
1115060016BS	M6	16	32	16	3.6	B - ocynk biały

Material index	d	L [mm]	e [mm]	k [mm]	Mekaaninen luokitus	Pinnoite tyyppi
1115050012BS	M5	12	25	12	3.6	B - ocynk biały
1115050010BS	M5	10	25	12	3.6	B - ocynk biały
1115050016BS	M5	16	25	12	3.6	B - ocynk biały
1115050030BS	M5	30	25	12	3.6	B - ocynk biały
1115050020BS	M5	20	25	12	3.6	B - ocynk biały
1115040016BS	M4	16	20	10	3.6	B - ocynk biały
1115040010BS	M4	10	20	10	3.6	B - ocynk biały
1115100020BS	M10	20	45	22	3.6	B - ocynk biały
1115100040BS	M10	40	45	22	3.6	B - ocynk biały