



Luokka:

Pinnoite tyyppi:

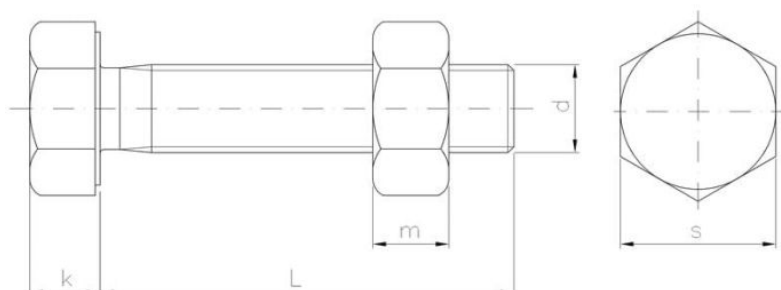
SEND THE INQUIRY

+358 103 195 100

Standards:ISO 4017, ISO 4032
PN-EN 15048

8.8

G

OCYNK
OGNIOWY

Dimensions

| Material index | d | L [mm] | k [mm] | s [mm] | m [mm] | Mekaaninen luokitus | Pinnoite tyyppi |
|------------------|-----|--------|--------|--------|--------|---------------------|-------------------|
| 1134240070G88SBP | M24 | 70 | 15 | 36 | 20.0 | 8.8 | G - ocynk ogniowy |
| 1134200055G88SBP | M20 | 55 | 13 | 30 | 16.0 | 8.8 | G - ocynk ogniowy |
| 1134200065G88SBP | M20 | 65 | 13 | 30 | 16.0 | 8.8 | G - ocynk ogniowy |
| 1134200070G88SBP | M20 | 70 | 13 | 30 | 16.0 | 8.8 | G - ocynk ogniowy |
| 1134200050G88SBP | M20 | 50 | 13 | 30 | 16.0 | 8.8 | G - ocynk ogniowy |
| 1134200060G88SBP | M20 | 60 | 13 | 30 | 16.0 | 8.8 | G - ocynk ogniowy |
| 1134160055G88SBP | M16 | 55 | 10 | 24 | 13.0 | 8.8 | G - ocynk ogniowy |
| 1134160065G88SBP | M16 | 65 | 10 | 24 | 13.0 | 8.8 | G - ocynk ogniowy |
| 1134160070G88SBP | M16 | 70 | 10 | 24 | 13.0 | 8.8 | G - ocynk ogniowy |
| 1134160045G88SBP | M16 | 45 | 10 | 24 | 13.0 | 8.8 | G - ocynk ogniowy |
| 1134160060G88SBP | M16 | 60 | 10 | 24 | 13.0 | 8.8 | G - ocynk ogniowy |
| 1134160040G88SBP | M16 | 40 | 10 | 24 | 13.0 | 8.8 | G - ocynk ogniowy |
| 1134160050G88SBP | M16 | 50 | 10 | 24 | 13.0 | 8.8 | G - ocynk ogniowy |
| 1134120030G88SBP | M12 | 30 | 8 | 18 | 10.0 | 8.8 | G - ocynk ogniowy |
| 1134120055G88SBP | M12 | 55 | 8 | 18 | 10.0 | 8.8 | G - ocynk ogniowy |
| 1134120045G88SBP | M12 | 45 | 8 | 18 | 10.0 | 8.8 | G - ocynk ogniowy |
| 1134120065G88SBP | M12 | 65 | 8 | 18 | 10.0 | 8.8 | G - ocynk ogniowy |
| 1134120050G88SBP | M12 | 50 | 8 | 18 | 10.0 | 8.8 | G - ocynk ogniowy |

| Material index | d | L [mm] | k [mm] | s [mm] | m [mm] | Mekaaninen luokitus | Pinnoite tyyppi |
|-----------------------|----------|---------------|---------------|---------------|---------------|----------------------------|------------------------|
| 1134120035G88SBP | M12 | 35 | 8 | 18 | 10.0 | 8.8 | G - ocynk ogniowy |
| 1134120060G88SBP | M12 | 60 | 8 | 18 | 10.0 | 8.8 | G - ocynk ogniowy |
| 1134120040G88SBP | M12 | 40 | 8 | 18 | 10.0 | 8.8 | G - ocynk ogniowy |