

SEND THE INQUIRY

+358 103 195 100

Standards:

DIN 914
ISO 4027
PN-M 82315

45H

Luokka:



B

POWŁOKA
CYNKOWA
BIAŁA

OX

OKSYDOWANIE

Pinnoite tyyppi:

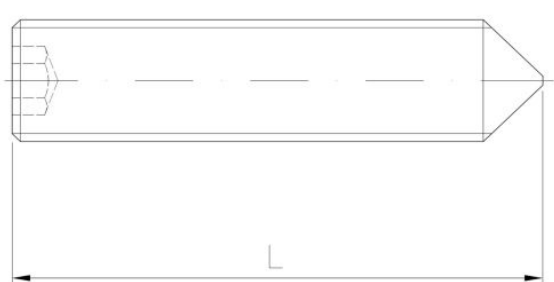

Dimensions

Material index	d	L [mm]	s [mm]	Mekaaninen luokitus	Pinnoite tyyppi
1202050010IMO914T	M5	10	2.5	45H	OX - powłoka oksydowana
1202040010IMB914T	M4	10	2	45H	B - ocynk biały
1202060010IMB914T	M6	10	3	45H	B - ocynk biały
1202060010IMO914T	M6	10	3	45H	OX - powłoka oksydowana
1202080010IMB914T	M8	10	4	45H	B - ocynk biały
1202040010IMO914T	M4	10	2	45H	OX - powłoka oksydowana
1202080010IMO914T	M8	10	4	45H	OX - powłoka oksydowana
1202060012IMO914T	M6	12	3	45H	OX - powłoka oksydowana
1202080012IMO914T	M8	12	4	45H	OX - powłoka oksydowana
1202060012IMB914T	M6	12	3	45H	B - ocynk biały
1202100016IMO914T	M10	16	5	45H	OX - powłoka oksydowana
1202060016IMO914T	M6	16	3	45H	OX - powłoka oksydowana
1202100016IMB914T	M10	16	5	45H	B - ocynk biały
1202080016IMB914T	M8	16	4	45H	B - ocynk biały
1202060016IMB914T	M6	16	3	45H	B - ocynk biały
1202080016IMO914T	M8	16	4	45H	OX - powłoka oksydowana
1202120020IMO914T	M12	20	6	45H	OX - powłoka oksydowana
1202100020IMO914T	M10	20	5	45H	OX - powłoka oksydowana

Material index	d	L [mm]	s [mm]	Mekaaninen luokitus	Pinnoite tyyppi
1202060020IMO914T	M6	20	3	45H	OX - powłoka oksydowana
1202080020IMB914T	M8	20	4	45H	B - ocynk biały
1202080020IMO914T	M8	20	4	45H	OX - powłoka oksydowana
1202100025IMO914T	M10	25	5	45H	OX - powłoka oksydowana
1202120025IMB914T	M12	25	6	45H	B - ocynk biały
1202100025IMB914T	M10	25	5	45H	B - ocynk biały
1202040004IMB914T	M4	4	2	45H	B - ocynk biały
1202030004IMO914T	M3	4	1.5	45H	OX - powłoka oksydowana
1202030005IMB914T	M3	5	1.5	45H	B - ocynk biały
1202030005IMO914T	M3	5	1.5	45H	OX - powłoka oksydowana
1202040006IMB914T	M4	6	2	45H	B - ocynk biały
1202040006IMO914T	M4	6	2	45H	OX - powłoka oksydowana
1202060006IMB914T	M6	6	3	45H	B - ocynk biały
1202050006IMB914T	M5	6	2.5	45H	B - ocynk biały
1202060006IMO914T	M6	6	3	45H	OX - powłoka oksydowana
1202050006IMO914T	M5	6	2.5	45H	OX - powłoka oksydowana
1202060008IMO914T	M6	8	3	45H	OX - powłoka oksydowana
1202040008IMO914T	M4	8	2	45H	OX - powłoka oksydowana
1202060008IMB914T	M6	8	3	45H	B - ocynk biały
1202050008IMO914T	M5	8	2.5	45H	OX - powłoka oksydowana
1202050008IMB914T	M5	8	2.5	45H	B - ocynk biały
1202040008IMB914T	M4	8	2	45H	B - ocynk biały
1202080008IMB914T	M8	8	4	45H	B - ocynk biały