


SEND THE INQUIRY

+358 103 195 100

Standards:

DIN 5685C

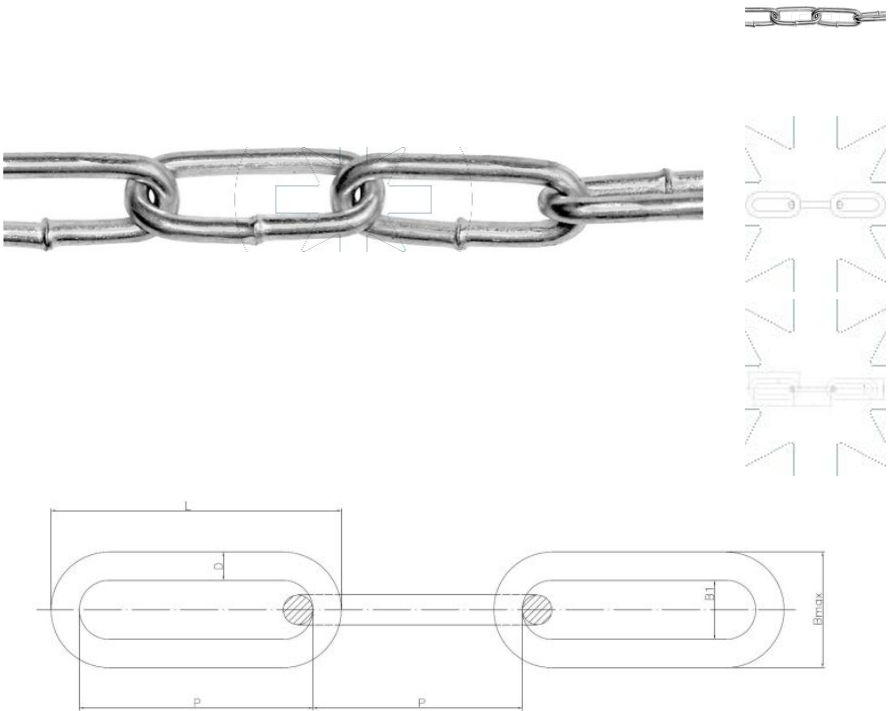

Pinnoite tyyppi:

| Dimensions     |        |        |        |         |           |                      |                  |
|----------------|--------|--------|--------|---------|-----------|----------------------|------------------|
| Material index | D [mm] | L [mm] | P [mm] | B1 [mm] | Bmax [mm] | Kuormitettavuus [kg] | Murtolujuus [kg] |
| 6307020OCD-2M  | 2      | 26.0   | 22     | 3.5     | 8.0       | 25                   | 125              |
| 6307030OCD-2M  | 3      | 32.0   | 26     | 5.5     | 12.0      | 56                   | 280              |
| 6307040OCD-2M  | 4      | 40.0   | 32     | 7.0     | 16.0      | 100                  | 500              |
| 6307050OCD-2M  | 5      | 45.0   | 35     | 9.0     | 20.0      | 160                  | 800              |
| 6307060OCD-2M  | 6      | 55.0   | 43     | 11.0    | 24.0      | 225                  | 1125             |
| 6307080OCD-2M  | 8      | 69.0   | 54     | 14.0    | 32.0      | 400                  | 2000             |
| 6307100OCD-2M  | 10     | 85.0   | 65     | 18.0    | 40.0      | 630                  | 3150             |