



Luokka:

Pinnoite tyyppi:

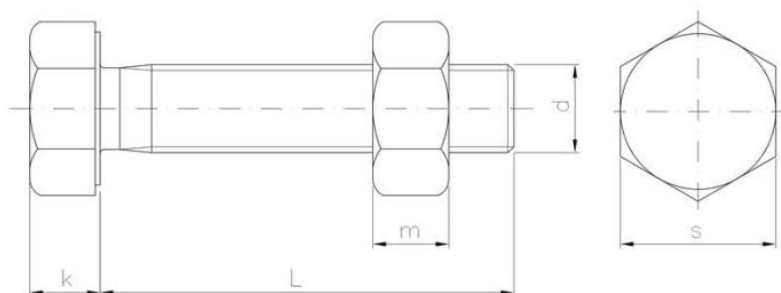
SEND THE INQUIRY

+358 103 195 100

**Standards:**ISO 4017, ISO 4032  
PN-EN 15048

8.8

G

OCYNK  
OGNIOWY

## Dimensions

| Material index   | d   | L [mm] | k [mm] | s [mm] | m [mm] | Mekaaninen luokitus | Pinnoite tyyppi   |
|------------------|-----|--------|--------|--------|--------|---------------------|-------------------|
| 1134240070G88SBP | M24 | 70     | 15     | 36     | 20.0   | 8.8                 | G - ocynk ogniowy |
| 1134200055G88SBP | M20 | 55     | 13     | 30     | 16.0   | 8.8                 | G - ocynk ogniowy |
| 1134200065G88SBP | M20 | 65     | 13     | 30     | 16.0   | 8.8                 | G - ocynk ogniowy |
| 1134200070G88SBP | M20 | 70     | 13     | 30     | 16.0   | 8.8                 | G - ocynk ogniowy |
| 1134200050G88SBP | M20 | 50     | 13     | 30     | 16.0   | 8.8                 | G - ocynk ogniowy |
| 1134200060G88SBP | M20 | 60     | 13     | 30     | 16.0   | 8.8                 | G - ocynk ogniowy |
| 1134160055G88SBP | M16 | 55     | 10     | 24     | 13.0   | 8.8                 | G - ocynk ogniowy |
| 1134160065G88SBP | M16 | 65     | 10     | 24     | 13.0   | 8.8                 | G - ocynk ogniowy |
| 1134160070G88SBP | M16 | 70     | 10     | 24     | 13.0   | 8.8                 | G - ocynk ogniowy |
| 1134160045G88SBP | M16 | 45     | 10     | 24     | 13.0   | 8.8                 | G - ocynk ogniowy |
| 1134160060G88SBP | M16 | 60     | 10     | 24     | 13.0   | 8.8                 | G - ocynk ogniowy |
| 1134160040G88SBP | M16 | 40     | 10     | 24     | 13.0   | 8.8                 | G - ocynk ogniowy |
| 1134160050G88SBP | M16 | 50     | 10     | 24     | 13.0   | 8.8                 | G - ocynk ogniowy |
| 1134120030G88SBP | M12 | 30     | 8      | 18     | 10.0   | 8.8                 | G - ocynk ogniowy |
| 1134120055G88SBP | M12 | 55     | 8      | 18     | 10.0   | 8.8                 | G - ocynk ogniowy |
| 1134120045G88SBP | M12 | 45     | 8      | 18     | 10.0   | 8.8                 | G - ocynk ogniowy |
| 1134120065G88SBP | M12 | 65     | 8      | 18     | 10.0   | 8.8                 | G - ocynk ogniowy |
| 1134120050G88SBP | M12 | 50     | 8      | 18     | 10.0   | 8.8                 | G - ocynk ogniowy |

| <b>Material index</b> | <b>d</b> | <b>L [mm]</b> | <b>k [mm]</b> | <b>s [mm]</b> | <b>m [mm]</b> | <b>Mekaaninen luokitus</b> | <b>Pinnoite tyyppi</b> |
|-----------------------|----------|---------------|---------------|---------------|---------------|----------------------------|------------------------|
| 1134120035G88SBP      | M12      | 35            | 8             | 18            | 10.0          | 8.8                        | G - ocynk ogniowy      |
| 1134120060G88SBP      | M12      | 60            | 8             | 18            | 10.0          | 8.8                        | G - ocynk ogniowy      |
| 1134120040G88SBP      | M12      | 40            | 8             | 18            | 10.0          | 8.8                        | G - ocynk ogniowy      |